





GS - 848 HDMI 4 WAY SPLITTER

The 1×4 HDMI Splitter uses a single HDMI sources, accessing to multiple HDMI sinks. The Splitter allows one HDMI devices to be split easily to eight HDMI compatible monitors or projectors. The Splitter can also be placed at the end of a long HDMI cable to regenerate the HDMI signal.

SPECIFICATIONS

Name of the product	1× 4 HDMI Splitter
Signal Inputs/ Output	1 input ...4 outputs
HDMI Connector	Type A 19 pin female
HDMI Version	HDMI 1.3b
HDCP Version	HDCP 1.2
HDMI Resolution	24/50/60fs/1080p/1080i/720p/576p/576i/480p/480i
Support video color format	24bit/deep color 30bit 36bit
Support audio format	DTS-HD/Dolby-true HD/LPCM7.1/DTS/Dolby-AC3/DSD
Max bandwidth	225MHz
Max baud rate	6.75Gps
Input cable distance	≤15m HDMI AWG26
Output cable distance	≤25m AWG26 HDMI 1.3 standard cable
Input/output DDC Signal	5 volts p-p (TTL)
Input/Output TMDS Signal	0.5~1.5 Volts p-p
Max working current	1.4A
Power adapter format... Input	AC(50HZ,60HZ) 100V-240V;Output: DC5V
Operating Temperature range	(- 15 to + 55 Celsius degree)
Operating Humidity range	5 to 90% RH (No Condensation)
Power Supply	5V
Accessories with the Machine	a) 5V power adapter b) one pc of manual

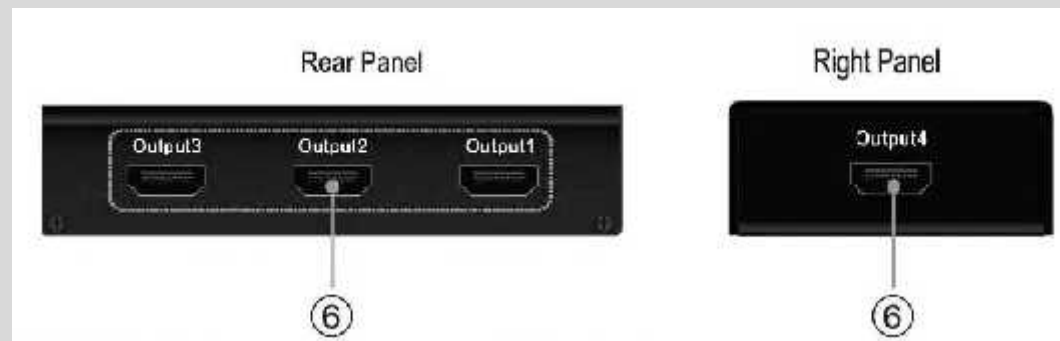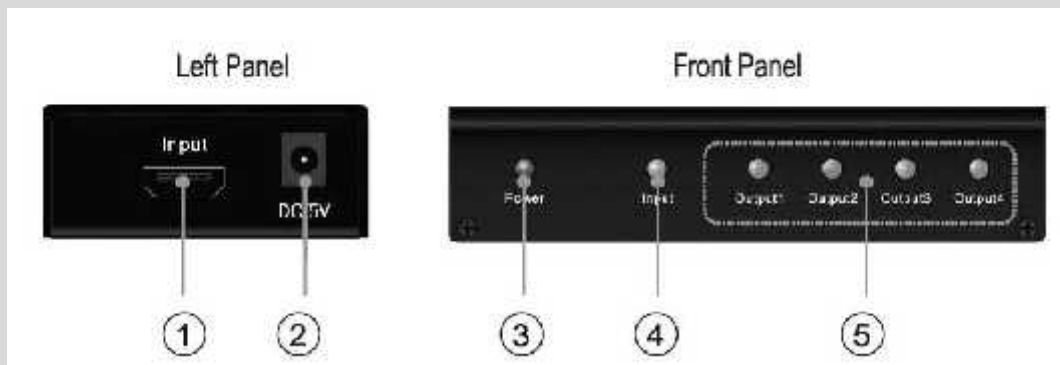

HDMI input port

Port indicator of power input

Indicator of HDMI output

Power input

Indicator of HDMI input

HDMI output ports

Connecting and Operating :

- 1) Connect the HDMI signal sources (such as PS3, STB etc) into HDMI input.
- 2) Connect the HDMI display device (such as HD-LCD, HD-DLP) into the HDMI output
- 3) Plug the 5VDC power supply into power input port and the unit is ready to use.

Attention: Insert/ Extract cables gently

- 1) Main Unit. 4-port HDMI splitterr
- 2) 5VDC Power Supply
- 3) Operating Instructions

MAINTENANCE

Clean this unit with a soft, dry cloth. Never use alcohol, paint thinner or benzene to clean this unit.