



GS - 888 HDMI 1X8 SPLITTER


FEATURES

- 1) HDMI TM (1.3b with 3D&1080p)
- 2) Distributes 1 HDMI source to 8 HDMI Displays simultaneously.
- 3) Supports all the mandatory and several optional 3D formats
- 4) Supports High Definition Resolutions : 1080p @ 60HZ, 720p/1080i @ 120Hz
- 5) Supports Digital Audio Format, such as High Definition Audio support: Dolby TrueHD, and DTS-HD Master Audio
- 6) DC 5V Power


SPECIFICATION

Name of the product	1× 8 HDMI Splitter
Signal Inputs/ Output	1 input ...8 outputs
HDMI Connector	Type A 19 pin female
HDMI Version	HDCP1.3
Support video format	DTV/HDTV:480i/576i/480p/576p/720p/1080i/1080p/3D video
Support audio format	DTS-HD Master Audio, Dolby true-HD etc.
Support video color format	Xv-YCC/deep color 36bit
Max baud rate	6.75Gps
Transmission Distance	15m(Maximum) over standard HDMI cable/26AWG
Power consumption	10 watts(Maximum)
Input/output DDC Signal	5 volts p-p (TTL)
Input/Output TMDS Signal	0.5~1.5 Volts p-p
Max working current	1.4A
Power adapter format... Input	AC(50HZ,60HZ) 100V-240V;Output: DC5V
Operating Temperature range	(- 15 to + 55 Celsius degree)
Operating Humidity range	5 to 90% RH (No Condensation)
Dimension	270×110×27.5mm

PANEL DESCRIPTIONS

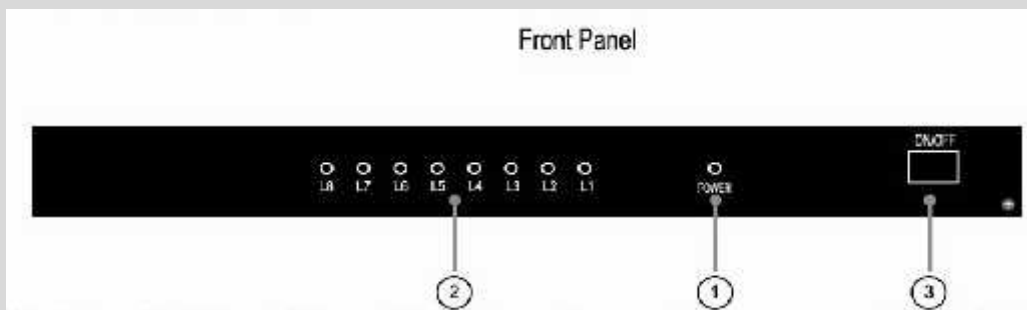

- 1) Indicator of HDMI Input. When a HDMI equipment is connected, the corresponding LED lights.
- 2) Indicator of HDMI output. When a HDMI equipment is connected , the corresponding LED lights.
- 3) Power ON/OFF. Press the up/down button to open/close the device.

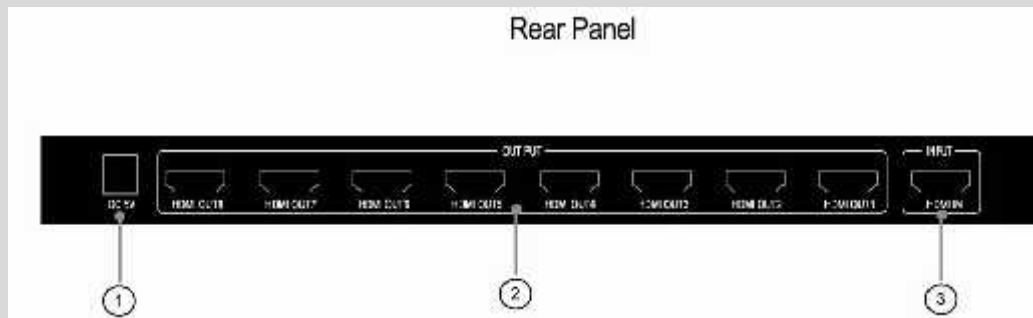

- 1) Power input
- 2) HDMI output ports
- 3) HDMI input port