


**Product Name:** *GULF STAR Speaker Cable 2x0.75mm<sup>2</sup> Pure Copper Transparent*

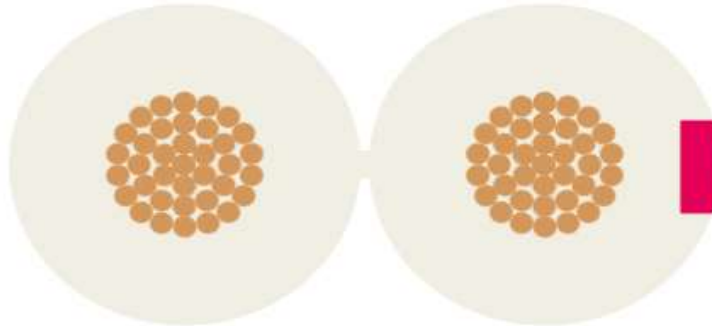

<b>Center Conductor</b>	<b>Material</b>	Annealed Bare Copper
	<b>Diameter</b>	19/0.20mm
	<b>Size</b>	0.75mm <sup>2</sup>
	<b>Core</b>	2
<b>Insulation</b>	<b>Material</b>	Transparent PVC
	<b>Diameter</b>	2.30*4.60mm
	<b>Average Skin Thickness (mm)</b>	0.65mm
	<b>Colour</b>	Transparent +Red
	<b>Colour</b>	Transparent
<b>Printing</b>	Gulf Star Speaker Cable Pure Copper 2X0.75mm <sup>2</sup> Manufactured with Advanced Technology Made in China 001~	
<b>Package</b>	100Yds & 300Yds/Plastic Spool, ID: 80±5mm, Width: 110±5mm, OD: 270±10mm	

**Mechanical Properties**

Minimum Bend Radius	6xD
Storage and Operating Temp. Range	-20~90°C
Flame Test	IEC 60332-1
Tensile Strength of Jacket	≥12.5Mpa
Elongation of jacket:	≥150%
Retention of Elongation After Aging	≥80%

**Electrical and Transmission Properties @ 20C**

Rated Voltage	300V max
Insulation Resistance	> 100MΩ.Km.min
DC Resistance of Conductors	≤29.9Ω/km
Spark Test (50Hz)	2.5KV / 1min Pass (Between Conductor & Between Conductor and Shield)
Continuity Test	100% PASS

**This Cable Fully Conforms to EU Directive 2011/65/EU (RoHS-2)**

Revision:	DATA	Issue / change content	Edited	Checker	Approval
A/1	8-10-2025		Qiu meihua	Weitianlong	Jinjianbing