



SINGLE COMPOSITE MATERIAL PULLERS INTO A STRONGEST WIRE GUIDER. (FLUORESCENT COLOUR)

Model	Dia. of wire	Length	Safety Load	Breaking Strength	Std. Pack
FT0310	4mm	10m	260 kgs	300 kgs	80/CTN
FT0315	4mm	15m			60/CTN
FT0320	4mm	20m			50/CTN
FT0330	4mm	30m			40/CTN

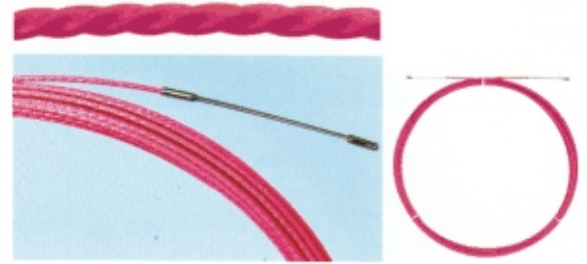


SINGLE COMPOSITE MATERIAL PULLERS INTO A STRONGEST WIRE GUIDER. (FLUORESCENT COLOUR)

Model	Dia. of wire	Length	Safety Load	Breaking Strength	Std. Pack
FT0415	4.5mm	15m	300 kgs	350 kgs	50/CTN
FT0430	4.5mm	30m			30/CTN
FT0450	4.5mm	50m			20/CTN
FT04100	4.5mm	100m			8/CTN
FT0430T	4.5mm	30m with carrier tube			14/CTN
FT0450T	4.5mm	50m			10/CTN

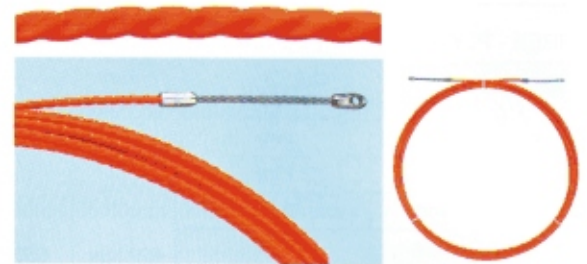


SINGLE COMPOSITE MATERIAL PULLERS INTO A STRONGEST WIRE GUIDER. (FLUORESCENT COLOUR)

Model	Dia. of wire	Length	Safety Load	Breaking Strength	Std. Pack
FT0515	5.2mm	15m	400 kgs	450 kgs	40/CTN
FT0530	5.2mm	30m			25/CTN
FT0550	5.2mm	50m			15/CTN
FT05100	5.2mm	100m			8/CTN
FT0530T	5.2mm	30m with carrier tube			14/CTN
FT0550T	5.2mm	50m			10/CTN

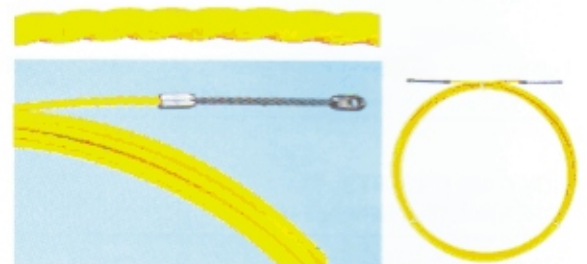

SINGLE COMPOSITE MATERIAL PULLERS INTO A STRONGEST WIRE GUIDER. (FLUORESCENT COLOUR)

Model	Dia. of wire	Length	Safety Load	Breaking Strength	Std. Pack
FT0615	6.2mm	15m	500 kgs	550 kgs	30/CTN
FT0630	6.2mm	30m			20/CTN
FT0650	6.2mm	50m			12/CTN
FT06100	6.2mm	100m			8/CTN
FT0630T	6.2mm	30m with carrier tube			14/CTN
FT0650T	6.2mm	50m			10/CTN

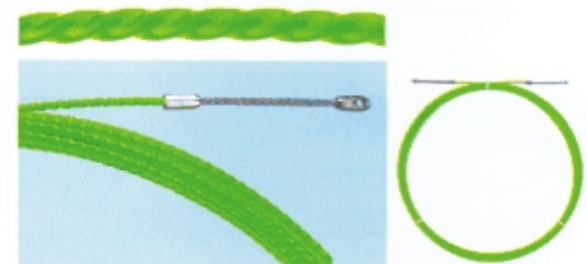

Wire Guider Accessories

QUICK CABLE TIGHTS SHORTEN THE WORKING TIME

Model	Safety Load	Application
QCT-2	120 kgs	TUBE 3/4"-1 1/2"
QCT-3	120 kgs	TUBE 1/2"- 3/4"

Storage Tube

Model	Dia. (Tube)	Dia. (Outline)
QCT-30	φ 46mm	φ 580mm
QCT-50	φ 57mm	φ 610mm

