



PRODUCTION

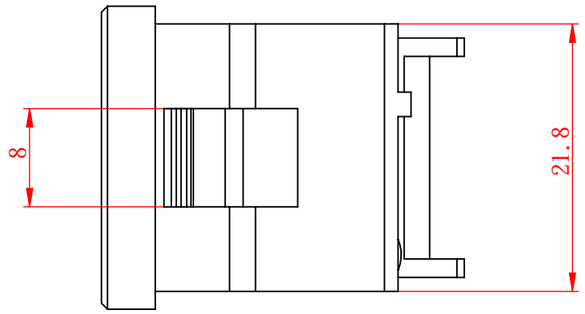


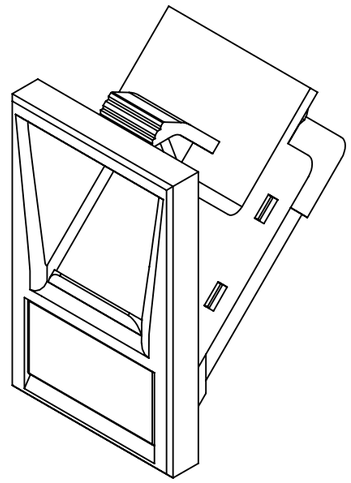

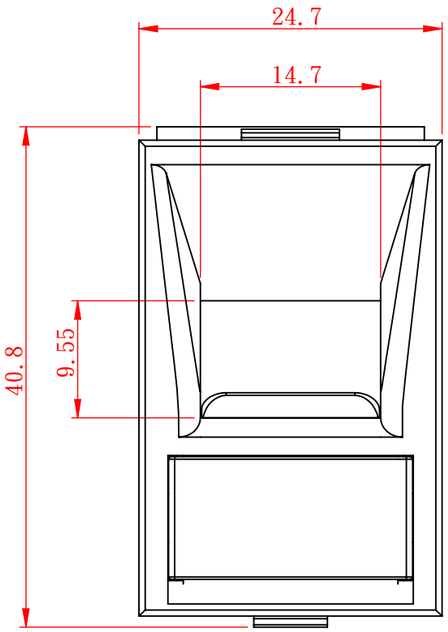

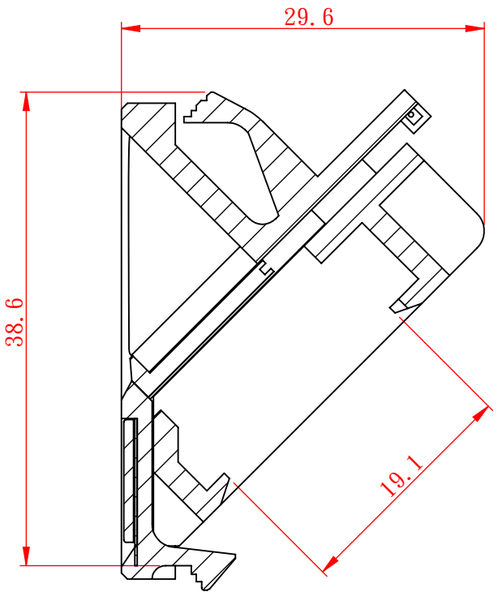

SECTION A-A

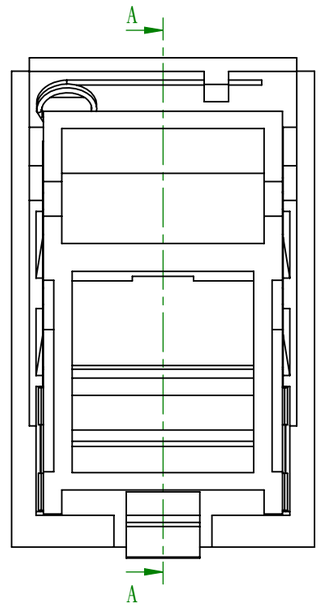

ENCLOSURE
I.D. PAPER X 1 PC
TRANSPARENT I.D. COVER X 1 PC

MATERIAL
SPRING : SUS304.
SIP PLASTIC : ABS, UL94V-0.
SHUTTER : ABS, UL94V-0.
TRANSPARENT I.D. COVER : PMMA, UL94HB.

PHYSICAL CHARACTERISTICS
OPERATING TEMPERATURE RANGE : -10 C TO 60 C.
STORAGE TEMPERATURE RANGE : -40 C TO 68 C.
HUMIDITY : 10% TO 90% RH (NON-CONDENSING).

Scale	2:1					All Copy Rights Reserved	
3rd Angle Projection						KUWES INDUSTRY CORPORATION	
Unit	mm					Title	
Date	2021/1/7					KS-253945A	
Tolerance						Drawn by	Checked by
~20	~50	~150	150~	ANGLE		Shou	
±0.2	±0.4	±0.5	±1.5	±2°			