





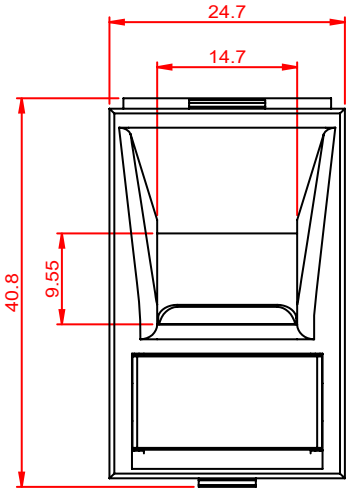


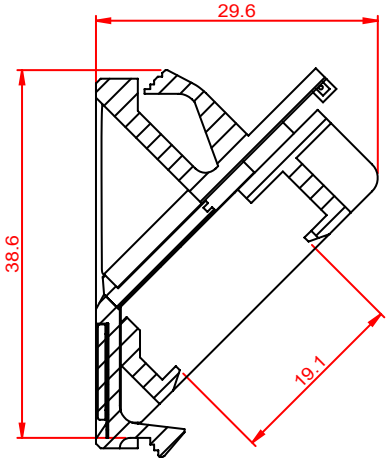



SECTION A-A

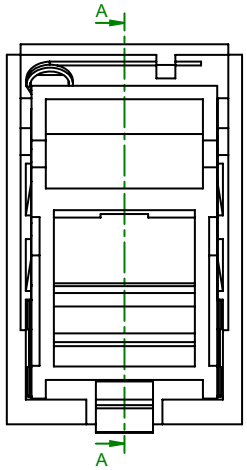







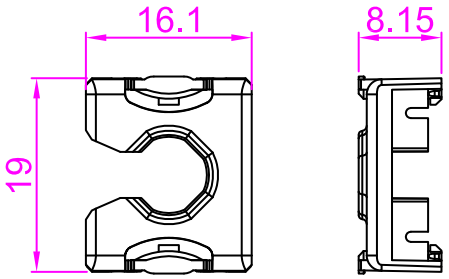

MATERIAL

SPRING : SUS304.
SIP PLASTIC : ABS, UL94V-0.
SHUTTER : ABS, UL94V-0.
TRANSPARENT I.D. COVER : PMMA, UL94HB.

PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE : -10 C TO 60 C.
STORAGE TEMPERATURE RANGE : -40 C TO 68 C.
HUMIDITY : 10% TO 90% RH (NON-CONDENSING).

GENERAL TOLERANCE OF DIMENSIONS					
X.XXX ±0.005 X.XX ±0.05 X.X ±0.1	DRAWING	07. JAN. 2021	JANE	**KUWES**	
	CHECK	07. JAN. 2021	BOB		
	APPROVAL	07. JAN. 2021	KELLY		
		DATE	NAME	ITEM NO.: AKE344A-C6-KAA	
	SCALE 1/1 (A4)	UNIT mm		DES.: 45 DEG. KEYSTONE MODULE BRACKET + C6 UTP JACK	
	DRAWING NO.				
	DRAWING CLASSIFICATION S		SHEET 1 OF 1	A1	